UHKDU/PRO/SOGE/SVS/0524 /2020	UNIVERSITY HOSPITAL General Sir John Kotelawala Defence University

University Hospital Kotelawala Defence University Werahara ,Boralesgamuwa

Sri Lanka

T:Phone: 0112044555 Fax: 0112044592

Web:

17 / 07 / 2023.

### INVITATION TO BID AND GENERAL CONDITIONS OF TENDER

- 1. The Vice Chancellor of the General Sir John Kotelawala Defence University, as the Chairman, Department Procurement Committee invites Bid/s from prospective Bidders for sewage treatment plants Course & rescue training programme
- 2. <u>CLOSING DATE & TIME</u>. The tender will close at 1400 hrs on **02/08/2023** Any Bid submitted after the closing time of the tender will be rejected & unopened such bids will be returned to the bidder.
- 3. <u>VALIDITY OF BID.</u> The bid submitted under this tender <u>must be valid for a period</u> of 120 days from the date of closing of tender.
- 4. **BID BOND / GUARANTEE.**

Tender No:

- (b) Submission of insufficient Bid Bond/Guarantee value or period will be considered as a "major deviation" and such offer will not be considered for further procurement action and will be rejected.
- 5. **VALUE ADDED TAX.** The Bidders who bid for locally delivered items must have the VAT registration. The VAT portion must be shown separately in the price schedule in Annex "A" and VAT registration number must be indicated. If the quoted item is exempted from VAT or Bidding Company is not liable for VAT, reference number and date of relevant Act number/Gazette notification/a certificate (as applicable) **issued for the current financial year** from the Commissioner General of Inland Revenue to that effect should be submitted along with the Bid.
- 6. **BID SUBMISSION.** The bidder must duly sign at the last page (before Annexes) of this document indicating the name of the signatory and the name of the company & place the company common seal to confirm the acceptance of tender conditions. The Bid/s that do not include authorized signature will be rejected. The Bid/s duly signed by the bidder enclosed and sealed in an appropriate cover addressed to the following address should be sent by registered post or could be deposited in the appropriate tender box placed at University Hospital Kotelawala Defence University, Werahara (at the Main Entrance of University Hospital Kotelawala Defence University) on or before the time & date specified for the closing of tender. The tender reference number, date & time of closing tender should be indicated & underlined at the top left corner of the envelop.

Tender Ref No : The Chairman,

Closing Date & Time : 1400 hrs on 02/08/2023. Department Procurement Committee,
University Hospital Kotelawala Defence University,
Werahara,
Sri Lanka.

- 7. The Bid/s must be submitted in the attached schedule of prices in Annex "A" as applicable. However, bidders could use similar formats prepared with their own letter heads with all the details mentioned therein and submit in three copies along with duly signed copy of a General Conditions of tender. The Bid/s must contain Technical Literature, Pamphlets, Drawings and Quality Standard Certificate etc necessary to determine characteristics of items offered and in case of Machinery/Vehicles & Equipment, servicing and workshop data/after sales service, back up facilities or any other facilities provided by the supplier.
- 8. <u>SUBMISSION OF SAMPLES/PAYMENT OF TESTING CHARGES</u>.

When it is required to submit samples, <u>every offer</u> must be accompanied with pre - marked samples. The marking of samples <u>indicating the Bidder & Offer number</u> must be done and the samples must be handed over to the officer at same place where tender box is placed <u>on or before the closing date</u> <u>& time of the Bid</u>. Samples submitted after closing time of the Bid will be rejected. The documents such as Air Way Bills etc, will not be accepted in place of samples. When the testing charges are required to be paid, bidders shall pay testing charges separately <u>for all offers</u> indicated in their bid/s.

(1) Samples. Please submit ...... samples.

- (2) <u>Testing Charges</u>. A sum of Rs. ..... <u>per offer</u> must be paid to the Bursar of KDU, prior to the submission of bid and a copy of the receipt must be annexed to the bid. It is the responsibility of bidder to inform the Cashier of the Account Office to note the tender number on the receipt issued for such payments.
- 8. **BID OPENING.** All duly received bids **will be opened immediately after the scheduled closing time of Bids at the same venue**. Bidders or their accredited agents could be present at the time of opening of bids.
- 9. PRICES.

For locally delivered items (including locally manufactured items & foreign items imported by the bidders) price must be quoted in Sri Lankan Rupees, inclusive of all charges for delivery of items to University Hospital General Sir John Kotelawala Defence University Werahara, <u>Unit price. VAT and Total price should be clearly indicated in schedule in Annex "A"</u>. Other than VAT, all other type of taxes (eg: NBT, BTT, etc.) should not be indicated separately and should be included in unit price.

10. **RESTRICTED TENDERS**. Invitation to Bids are circulated among the registered suppliers with Ministry of Defence (MOD), only bids submitted by registered suppliers will be allowed for consideration. However, Chairman, Department Procurement Committee reserves the right to invite the bids from multiple combinations of Procurement Methods as stipulated in Chapter III of the Government Procurement Guideline, 2006 to ensure highest competitiveness.

- 11. **PERFORMANCE BOND/GUARANTEE.** A successful bidder shall furnish a Performance Bond/Guarantee in the form of "On Demand" & "Unconditional" Bank/Insurance Guarantee for a sum equivalent to 10% of the contract value for every contract that exceeds Rs. 2,000,000.00 or equivalent amount in foreign currency through a recognized Commercial Bank registered in Sri Lanka or through an Insurance Company authorized by the Insurance Board of loss resulting from the supplier's failure to complete his performance obligations under the contract. If the contracted supplier fails to deliver the items Sri Lanka to issue such Performance Guarantee for this purpose, **within two weeks from the date of notification of award**. The proceeds of the Performance Bond/Guarantee shall be payable to the Vice Chancellor of the General Sir John Kotelawala Defence University as compensation for any o
- 12. time or fails to complete the works as per the agreed contract, **THE TOTAL VALUE OF THE PERFORMANCE BOND/GUARANTEE** will be forfeited. If only partial delivery is made during the agreed contract period, the corresponding value percentage of undelivered quantity from the Performance Bond/Guarantee will be forfeited.
- 13. SIGNING OF CONTRACT. The notification of award will be transmitted to the successful bidder by post, by fax or email. This notification constitutes the formation of the contract. The successful bidder should submit his written acceptance for the award and performance bond / guarantee (For awards over Rs. 500,000.00 without VAT) within 14 days of receipt of such notification. Upon acceptance of the award and furnishing of the Performance Bond/Guarantee, the successful bidder will have to enter into a formal contract with the Vice Chancellor of the General Sir John Kotelawala Defence University by signing the Contract.
- 14. **DELIVERY.** Preference will be given for early delivery. In case of bulk supplies for locally manufactured items, the delivery of **total quantity must be completed within 120 days of signing of contract**, unless mutually agreed for extended delivery period with University Hospital Kotelawala Defence University. **The bidder/s must indicate the proposed delivery schedule in Annex "E"**. In the event of placing a purchase order with the successful bidder, the total quantity so ordered must be supplied as one consignment unless part deliveries are agreed upon in the contract. The deliveries not made as per agreed delivery schedule will be considered as bad performances by the suppliers and **no extended delivery period will be authorized**. Under extreme unavoidable conditions too, the Chairman, Department Procurement Committee (Vice Chancellor of the General Sir John Kotelawala Defence University) reserves the right to grant or refuse delivery period extensions only within the current financial year with or without liquidated claim for delayed deliveries and that decision will be final.
- 15. **LIOUIDATED DAMAGES.** In case of delivery period extensions requested by the successful bidder, a sum equivalent to 2% of the total value of the delayed supply per delay of one week or part thereof may be deducted from the payment due to the supplier from the University Hospital General Sir John Kotelawala Defence University as liquidated damages up to the maximum limit of 10% of the total value of delayed supplies.
- 16. PAYMENT TERMS FOR LOCALLY DELIVERED ITEMS. Payment will be made after acceptance of items which should be subjected to a pre-acceptance inspection/testing by University Hospital General Sir John Kotelawala Defence University authorities. The delivery made to University Hospital should not be considered as quantities taken over by University Hospital General Sir John Kotelawala Defence University until items are properly accepted after pre-acceptance inspection. Any item that does not conform to the specifications or already approved sample will be rejected & it is the responsibility of the supplier to remove them from University Hospital stores/premises within 07 working days of such intimation (either verbal or written) at his own cost and replace them with items conforming to specification within one month of such rejection. The bidder shall allow approximately 60-90 days period of credit from the date of acceptance of items for Account Office, University Hospital General Sir John Kotelawala Defence University to obtain liquid cash from General Treasury & release the payment.
- 16. **RIGHTS OF THE PROCUREMENT COMMITTEE**. The Department Procurement Committee reserve the right to accept or reject whole or part of this tender and their decision will be final. The successful bidders will be notified. Information with regard to rejected or unsuccessful bids will not be communicated.

PROCUREMENT MANAGER
University Hospital Kot lawala Defence University

king You, Afaithfully

I/We agree to abide by the conditions of tender and undertake to supply the items as per delivery schedule mentioned in the contract, in the event of an order been placed with me/my firm/company as a result of this tender.

......Signature
......Name of Signatory
......Name of the Company/Bidder

Date :- ......Company seal

### FILE NO - UHKDU/PRO/SOGE/SVS/0524/2020

### SCHEDULE OF PRICES FOR LOCALLY DELIVERED ITEMS

S/N	ITEMS	UNIT	QTY	PRICE EACH SLRS	TOTAL PRICE SLRS
01	Design, Fabrication & Build of Soundproof				
	Audiology Room Of ENT				
	Specification is attached here with Annex "B"				
	TOTAL				
	DISCOUNT				
	TOTAL(AFTER DISCOUNT)				
	VAT %				
	GRAND TOTAL				

2.	a . Validity	: 120 days from the date	of closing of tender	
	b . Payment term	: Credit		
	c .Warranty	:		
	d . Brand name	:		
	e .Country of origi	:		
3.	VAT Registration No.	:		· • • • • • • • • • • • • • • • • • • •
4.	Name of the Company			
5.	Testing Charges Paid. Receipt No and Date: .	: Rs		
6.	Signature of Bidder :			
7.	Date. :			
8.	MOD registered No :		Company Seal:	

### 1. Project

Settling up a professional Audiometric suite for ENT Department of University Hospital of KDU, for conducting Diagnostic tests for patients with hearing impairments and related issues.

### 2. Scope

proposed by the ENT Consultant of UHKDU, soundproofing and final finishes to comply with professional standards. The scope of the project involves re-configuration of the room layout in the allocated space in the existing building, as per the new room layout

Proposed Audiometric suite comprises of three sound proof functional modules.

- ) Audiometric Booth (Patient's Room)
- Control Room (Audiologist's room)
- Audiology Room (ABR room)

### 2.1 Scope of the document

of the three functional modules. This specification addresses the needs of stipulation of standards for the setting up of the aforementioned Audiometric suite comprising

## 3. Technical Specifications

	1 At	Number	Item Re
1. Noise level < 34 dB	Audiometric Booth		Requirement
		category	Priority
9 8		Yes	Conforr
		No	mity
September 1999	All appropriate and a	Design of the last	Proof
		Remarks	Bidder's off

		PROCUREMENT MANAGER University Hospital General Sir John Kotelawala Defence University Werahera
	•	
	10 TO	
	e 2.	the it, out out sh
system switched "on."  All structure borne vibrations shall be eliminated through means of isolation Double wall construction shall be used where necessary & applicable.  Refer to table 1. below for details of NR characteristics.	and Absorption level – Material Average RC > 0.9 Internal sound absorption shall be at or better than the levels given in the table 2. at respective frequencies indicated. Any acoustically hard surfaces shall be lined with absorbent layers in order to minimize sound reflection.  Reverberation time < 0.25 seconds.	all construction  Construction of masonry walls, during the re-configuration of current room layout, shall be carried out using the same types of material as in the existing construction. (Concrete, Cement blocks, Bricks etc.) but no subst tutes.  Inner walls shall be treated with acoustically absorbent material of which wool etc. on wooden frames etc.) to improve absorption and a top final finish
system switched "on."  All structure borne vibrations shall be eliminated through means of isolation Double wall construction shall be used where necessary & applicable.  Refer to table 1. below for details of N characteristics.	and Absorption level – Material Awares of 20.9 Internal sound absorption shall be a better than the levels given in the tat respective frequencies indicated. Any acoustically hard surfaces shall lined with absorbent layers in order minimize sound reflection. Reverberation time < 0.25 seconds	all construction  Construction of masonry walls, during re-configuration of current room lay shall be carried out using the same ty of material as in the existing construction concrete, Cement blocks, Bricks etc. no substitutes.  Inner walls shall be treated with acoustically absorbent material of whool etc. on wooden frames etc.) to improve absorption and a top final financovers.
id "on." orne vibr ough me nstructic iry & apl I. below	and Absorption level – Mat RC > 0.9 Internal sound absorption s better than the levels given at respective frequencies in Any acoustically hard surfact lined with absorbent layers minimize sound reflection. Reverberation time < 0.25	all construction  Construction of masonry w re-configuration of current shall be carried out using th of material as in the existin (Concretz, Cement blocks, no subst tutes. Inner walls shall be treated acoustically absorbent mat NRC>0.9 ( 2-inch thickness wool etc. on wooden fram improve absorption and a
system switched "on." All structure borne vibi eliminated through me Double wall constructi where necessary & ap Refer to table 1. below characteristics.	ossorptional sound than the ective fi ousticall vith abscrize soun peration	all construction of re-configuratio shall be carried of material as i (Concrete, Cerr no subst tutes. Inner walls sha acoustically abs NRC>0.9 (2-inc wool etc. on wimprove absorption)
system All stru elimina Double where Refer to	Sound Absorption level – Mat  NRC > 0.9 Internal sound absorption s better than the levels given at respective frequencies in Any acoustically hard surfac lined with absorbent layers minimize sound reflection.  Reverberation time < 0.25	Wall construction of re-configuration shall be carried of material as in (Concrete, Cemon subst tutes. Inner walls shall acoustically abs NRC>0.9 ( 2-incl wool etc. on we improve absorp
<b>∷</b>	7	e :=

hall be inimize	m the ake it a string to the s	ated from talled.  caluding he weight se of q foot. bsorb bise
layer. Asymmetric wall constructions shall be applied, where necessary, to minimize Reverberation time.	A secondary ceiling, Isolated from the building structure, shall be rested on inner walls of the booth in order to make it a sealed & sound proof inner booth.  Air conditioning ducts should be terminated at this ceiling, with circular diffusors through flexible couplings.  Inner surface of the ceiling should be acoustically treated with absorbent layers and appropriate final finishes.  Asymmetric ceiling constructions shall be applied, where necessary, to minimize Reverberation time.	A floating floor, acoustically isolated from the structural floor, shall be installed. Thickness > 25mm solid floor (Excluding re-enforcement frame, if any). Shall be strong enough to bear the weight of inner walls of the booth, in case of double wall construction. Load bearing capacity > 50Kg / sq foot. Shall be treated acoustically to absorb sound and minimize foot step noise (Carpeting, under layers etc).
≡	4, ∵ ≒	7. FB

													<b>S</b> Jer	ahera			AGER la Defe
		And the second s										STATE OF STA					
nsh		.5"	pue	set					(I).								0.
Shall be Sound proof, single leaf and flush mounted to the wall with frame.	Material - Steel (Gl coated and spray painted or powder coated).	STC Rating >50 Dimensions of D2 - 7' (H) $\times$ 3' (W) $\times$ 2.5"	(D). Acoustically treated to be sound proof and	Shall be anchored with heavy duty, offset	pivoted, cam-lift hinges (self closing). Fitted with Dual line Neoprene / EPDM	Rubber compression beading on the perimeter for sound proofing (all four	sides). Bottom sill - Stainless Steel plate	compressed.	Tower Bolt type latches (Stainless Steel).		Modular fabrication of Door & Frame.	Window - (To control room)	Condensation free Double Glazed unit	(DGU) glass window with 6mm glasses	Encapsulated in Aluminum / GI Frame	Dimensions 4' (W) ×3' (H)	Desiccator material included in the gap.
		:≟ i <b>≡</b>	.≥	>	. <u>;</u>		×.		: <i> : &lt; :</i>	· ×	×.	7. W			:=:	ii .≥	> >

PROCURENIANT MANAGER
University Hospital
General Sir John Kotelawala Defence University
Werahera 10. 00 ≤. ₹ 🗐 ≓ 9. ₹ = = < ₹ = Speaker mounts Temperature Illumination Interface connector / jack /patch panel Flexible coupling for the air gap (Min. 4"). be installed for the same. See note 1 below. 02 lighting fixtures (ceiling mounted), 30" height level from the floor of the Minimum Light level - 800 Lux , Inside at Controller mechanisms / Electronics shall See note 2 below. Centigrade. Adjustable - between 20 – 27 degrees Pre wired individual switches with RFI-free diffused light. RFI free LED lighting. Colour Temperature >6000 K (Cool white) Dimmers. Flicker-free, even distribution with 02 Nos. Swivel mounts with Three DOF Nos.) - Acoustically isolated from the Vertical pole type spéaker mounts (02 Pre-wired speaker points Height adjustable along the vertical pole floor, walls or ceiling. (compatible with the weight of speaker)

			PROCUM University General S	REMIANT MANAGER Hospital II John Kotelawala Defe	nce U
be installed below the window to the control room. It shall contain, 3-pin Standard ¼" Phone sockets - 04 nos. USB sockets - 02 nos. 9-pin D socket - 01 No. BNC sockets - 02 nos. 2-pin Speaker sockets - 02 nos.	These connectors shall be connected to a similar patch panel (via one-to-one trunk lines), to be installed on the other side of the same wall, in the control room (Audiologist's room)- Refer "item 11" under "control Room specifications". Metallic plate shall be connected to system ground.	Electrical outlets 13 Amp Square pin (with ground) outlets – 04 Nos. – below the Interface jack panel.	Accessories - Hanger bar A horizontal hanger bar for patch cables, headphones etc. on the wall, mounted close to the patch panel.	Room  Noise level < 40dB  Ambient noise level inside the control	
± ;≓	ii .≥	12. El	13. Ac	Control Room 1. Noise i. An	
				2	

PROCUREMENT MANAGER
University Hospital
General Sir John Kotelawala Defence University < =: == 3 2. =: ₽ Roof (Ceiling) NRC > 0.9 Sound Absorption level – Material Average Wall construction minimize sound reflection. Internal sound absorption shall be at an absorption. acoustically absorbent material and a top Inner walls shall be treated with no substitutes. be carried out using same types of Construction of masonry walls, during the Any acoustically hard surfaces shall be average level of 0.6 or more. eliminated through means of isolation or All structure borne vibrations shall be final finish layer. material as in the existing construction re-configuration of the room layout, shall lined with absorbing layer in order to conditioning system switched "on". room shall be less than 40 dB with Air (Concrete, Cement blocks, Bricks etc.) but A secondary ceiling shall be installed, in case if the stipulated conditions cannot diffusors through flexible coupling. terminated at this ceiling, with circular Air conditioning ducts should be absorption conditions, reverberation installed to achieve stipulated noise and An acoustically treated ceiling shall be



			PROCUREMENT MANAGER University Hospital General Sir John Kotelawala Defence
	A STANDARD OF THE STANDARD OF		
ninated ar gs. d be ent	stically quency oot step ).	nd flush painted x 2.5"	g). PDM ne our
a single celling. g is installed, Air ts should be termina lling, with circular flexible couplings. he ceiling should be ted with absorbent oriate final finishes.	be treated acou e borne low free and minimize fo inder layers etc.	of, single leaf ar all with frame. Il coated, Spray  7' (H) x 3' (W) d to be sound p	with heavy duty inges (self closin ie Neoprene / El on beading on the id proofing (all fa ess Steel plate
be acmisved with a single celling.  If a second ceiling is installed, Air conditioning ducts should be terminated at the second ceiling, with circular diffusors through flexible couplings.  Inner surface of the ceiling should be acoustically treated with absorbent layers and appropriate final finishes.	Existing floor shall be treated acoustically to absorb Structure borne low frequency vibrations, sound and minimize foot step noise (carpeting, under layers etc.).	Shall be Sound proof, single leaf and flush mounted to the wall with frame.  Material - Steel (GI coated, Spray painted or Powder coated).  STC Rating >50  Dimensions of D2 - 7' (H) x 3' (W) x 2.5" (D).  Acoustically treated to be sound proof and absorptive.	Shall be anchored with heavy duty, offset pivoted, cam-lift hinges (self closing). Fitted with Dual line Neoprene / EPDM Rubber compression beading on the perimeter for sound proofing (all four sides).  Bottom sill - Stainless Steel plate
. <u>2</u>	5. Floor	6. Doors i. Shania ii. Main. String iv. Acc. (D)	::. .:i:i:i
	9		

 $\bigcap$ 

		PROCURENIANT MANAGER University Hospital General Sir John Kotelawala Defence Uni Werahera
<b>≡</b> = - 9	₹ ≣	.7 X X X X
Illumination Minimum Light level - 800 Lux - Inside at 30" height level of the booth. Colour Temperature > 6000 K (Cool white) 04 lighting fixtures (ceiling mounted), Flicker-free, even distribution with diffused light.	Double glazed window to the Audiometric booth.  Condensation free Double Glazed unit (DGU) glass window with 6mm glasses Hermetically sealed.  Encapsulated in Aluminum / GI Frame. Dimensions 4' (W) x 3' (H)  STC > 45  Desiccator material included in the gap Flexible coupling for the air gap (Min. 4").  Temperature  Adjustable between 20 – 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same.	Key lock type latches (Stainless Steel). Stainless Steel Push Plates & Pull handles. Dual layer glass Vision Panel. Modular fabrication of Door & Frame. Window — (to Audiometric booth) This refers to a part of the item given above under Audiometric booth (item 6).
		E - 20 8

Speaker mounts with Three DOF (compatible with the weight of speaker) – (compatible with the weight of speaker panel shall be installed below the window to the Audiometric booth.  It shall contain.  3-pin Standard X" Phone sockets - 04 nos. USB sockets - 02 nos.  9-pin Standard X" Phone sockets on one-to-one trunk lines), to be installed on the other side of the same wall, in the Audiometric booth pecifications".  Audiometric booth specifications". Metallic pale shall be connected to system ground.  Electrical outlets  13 Amp Square pin (with ground) outlets – 04Nos. – below the Interface jack panel, on the same wall.		•					PROCUI	ir John Kotelawala Defe
mounts with Three I the the weight of special that he weight of special that he weight of special that he weight of special to window to the window the window the one stalled on the other sing the Audiometric but the Interface jack purity with ground) of with I with ground of with I with Bround of with I will with I will with I will will will with I will will will will will will will wi								
	circuit) with RFI-free dimmers.	Speaker mounts 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) — Acoustically isolated from floor, wall and ceiling. Pre-wired speaker points	Interface connector/jack/patch panel	A Flush mount metallic patch panel shall be installed below the window to the Audiometric booth.	It shall contain, 3-pin Standard ¼" Phone sockets - 04 nos. USB sockets - 02 nos. 9-pin D socket - 01 No. BNC sockets - 02 nos.	2-pin Speaker sockets - 02 nos. These connectors shall be connected to a similar patch panel (via one-to-one trunk lines), to be installed on the other side of the same wall, in the Audiometric booth	(Patient's room)- Refer "item 11" under "Audionietric booth specifications".  Metallic plate shall be connected to system ground.	e pin (with ground) c v the Interface jack p

GER Defence University

						=	T MMMMMV
					з	면 Ur GG 왕	ROCURENIANT MANA Inversity Hospital eneral Sir John Kotelawala erahera
<ol> <li>Floor         <ol> <li>Existing floor shall be treated acoustically to absorb Low-Frequency vibrations,</li> </ol> </li> </ol>	<ol> <li>Ceiling         <ol> <li>Primary ceiling shall be acoustically                 treated to maintain the required                 absorption level.</li> </ol> </li> </ol>	3. Wall Construction i. Inner walls shall be treated with acoustically absorbent foam backed fabric layer. ii. Maximum thickness shall not exceed 1"	<ol> <li>Sound Absorption level - Material average&gt;         <ol> <li>0.9 NRC.</li> <li>Internal sound absorption shall be at an average level of 0.6 or more.</li> </ol> </li> </ol>	Noise level < 40 dB     Ambient noise level inside the control room shall be less than 40 dB with Air conditioning system switched "on".	Audiology Room (ABR room)	headphones etc. on the wall, mounted on to the left hand side of the patch panel – with provision of adequate space for the control desk.	<ul> <li>ii. 13 Amp Square pin (with ground) outlets – 04 Nos. – at 14-inch level from the floor, on the opposite wall.</li> <li>13. Accessories – Hanger Bar</li> <li>i. A horizontal hanger bar for patch cables,</li> </ul>
		office St. Louise payor.	real production	(Bell control			auth break loss and thus
				The British And A			
		508					

Shall be sound proof , single leaf and flush mounted to the wall.  Marerial – Steel STC Rating >50  Dimensions of D2 - 7' (H) x 3' (W) x 2.5"  (D)  Acoustically treated to be sound proof and absorptive.  Shall be anchored with heavy duty, offset pivoted, cam-lift hinges (self closing).  Fitted with Dual line Neoprene / EPDM  Rubber beading on the perimeter for sound proofing fall four sides).  Fitted vith Dual line Neoprene / EPDM  Rubber beading on the perimeter for sound proofing fall four sides).  Stainless Steel plate  Compressed.  Key locit type latches (Stainless Steel).  Stainless Steel Push Plates & Pull handles.  Modular fabrication of Door & Frame.  See not 1 below.  Controller mechanisms / Electronics shall		PROCURENIANT MANAGER University Hospital General Sir John Kotelawala Defence Uni Werahera
Shall be sound proof , single leaf and flush mounted to the wall.  Material - Steel  STC Rating >50  Upinensions of D2 - 7' (H) x 3' (W) x 2.5"  Fourtizally treated to be sound proof and absorptive.  Shall be anchored with heavy duty, offset pivoted, cam-lift hinges (self closing).  Fitted with Dual line Neoprene / EPDM  Rubber beading on the perimeter for sound proofing (all four sides).  Bottomis III - Stainless Steel plate  Compressed.  Key lock type latches (Stainless Steel).  Stainless Steel Push Plates & Pull handles.  Modular fabrication of Door & Frame.  Modular fabrication of Door & Frame.  Adjustable between 20 – 27 degrees  dijustable between 20 – 27 degrees  see not. 1 below.  Soutroller mechanisms / Electronics shall		
Shall be sound proof, single leaf and flush mounted to the wall.  Material - Steel  STC Rating > 50  Dimensions of D2 - 7' (H) x 3' (W) x 2.5"  (D).  Acoustically treated to be sound proof and absorptive.  Shall be anchored with heavy duty, offset pivoted, cam-lift hinges (self closing).  Fitted with Dual line Neoprene / FPDM  Rubber beading on the perimeter for sound proofing (all four sides).  Bottom sill - Stainless Steel plate  compressed.  Key lock type latches (Stainless Steel).  Stainless Steel Push Plates & Pull handles.  Dual laver glass Vision Panel.  Modular fabrication of Door & Frame.  peratura  wijustable between 20 – 27 degrees sentigrade.  sie notu 1 below.  controller mechanisms / Electronics shall		
Shall be sound proof, single leaf and flush mounted to the wall.  Material - Steel  STC Rating >50  Dimensions of D2 - 7' (H) x 3' (W) x 2.5"  (D).  Acoustically treated to be sound proof and absorptive.  Shall be anchored with heavy duty, offset pivoted, cam-lift hinges (self closing).  Fitted with Dual line Neoprene / EPDM  Rubber beading on the perimeter for sound proofing (all four sides).  Bottom sill - Stainless Steel plate  compressed.  Key lock type latches (Stainless Steel).  Stainless Steel Push Plates & Pull handles.  Dual laver glass Vision Panel.  Modular fabrication of Door & Frame.  peratura  djustable between 20 – 27 degrees  entigrade.  see notu 1 below.  see notu 2 below.		
Temp	Door Shall be sound proof, single leaf and flush mounted to the wall. i. Material - Steel ii. STC Rating >50	7. Temperature Adjustable between 20 – 27 degrees Centigrade. See note 1 below. i. See note 2 below. controller mechanisms / Electronics shall

-			T			1			
								A Produced by	
					A STATE OF S	plate	1800 (8 of 1910)		E TOTAL MANAGEMENT
be installed for the same.	8. Illumination i. Minimum light level - 800 Lux - Inside at 30" height level from the floor of the booth. ii. Colour Temperature > 6000 K (Cool white). iii. 04 lighting fixtures (ceiling mounted), Flicker- free, even distribution with diffused light. iv.Pre wired, 02 switches (two fixtures per circuit) with RFI-free dimmers.	9. Electrical Outlets i. 13 Amp Square pin (with ground) outlets – 04Nos. – on the wall.	Buffer Area	1. Noise level < 45 dB	<ul><li>i. Ambient noise level inside the Buffer area shall be less than 45 dB.</li><li>( Not critical but acts as a noise buffer for two rooms)</li></ul>	2. Sound absorption level	i. Absorption can be at a moderate ( >0.4 material average) level to suppress incoming noise through sound leakages through doors ,if any. (Not critical)	3. wall construction i. Acoustical fabric overlaid thin layer of absorbent ( max ¾") on four sides of the wall.	4. Ceiling
			4.						

													Univer Gener	CUREME rsity Hosp al Sir Joh iera	ANT MA otal in Kotelav	NAGER walla Defend
- A		and Studies of the state of the				04400	10 10 10 10 10 10 10 10 10 10 10 10 10 1	T WORK SAN			Tree can braine 2 . S		Mission sound se	Host.	AND DESCRIPTION OF THE PERSON	School productions of
		OLN MOS 4 September		AND DIVIDENCE OF THE PROPERTY	DESCRIPTION OF STREET STREET,	District AND STREET			off appeal Tryesi options	and the control of th	floor law is	And the second	CARL DESCRIPTION OF THE PARTY O		Att hashe of sales for	
		TOTAL TOTAL	Month and and							September 1995		1000	1000			
<ol> <li>Suspended acoustic panel ceiling (Mineral c.) with moderate absorption.</li> </ol>		<ul> <li>i. Floor carpeting (Loop pile carpet) with form a under layer,</li> </ul>		Shall be sound proof, single leaf and flush mounted to the wall.	Steel		III. Dimensions of D1 - $7'$ (H) x 3' (W) x 2.5" (D) iv. Acoustically treated to be sound proof and	bsorptive.	pivoted, cam-lift hinges (self closing).	Rubber beading on the perimeter for sound	proofing all four sides). Bottom si I - Stainless Steel plate		viii. Key-lock type latches (Stainless Steel).	Modular fabrication of Door & Frame.		i. 600 LUX , Even illumination. ii. Colour Te nperature > 6000 K (Cool white)
i. Suspended acoustic panel fiber etc.) with moderate absorption	5. Floor	i. Floor carpet or quire under layer.	6. Door	Shall be so	i. Material - Steel	ii. STC Rating >40	in. Dimensions iv. Acoustically	absorptive.		Rubber baa	proofing all	compressed	viii. Key-lock ty	x. Modularfa	7. Illumination	i. 600 LUX , Ev ii. Colour Te np

			8	
<ul> <li>i. RED Warning lamps - 02 Nos.</li> <li>Installed over 1) Control room door</li> <li>2) Audiology room door</li> <li>With individual switches pre-wired to control desks of respective rooms</li> </ul>	10. Accessories	i. 13 Amp – 3-pin power outlet - 01 No.	9. Electrical Outlets	iii. 01 No. fixture (ceiling mounted) with pre wired switch on the wall.
	The second			
18 2 1				
unifor Separate Participae, unital				

(Double wall)	NR in dB	(Single wall)	NR in dB	Freq (Hz)
	47		24	125
	62		30	250
	83		40	500
	91		50	1000
	99		55	2000
	97		55	4000
	91		55	8000

Table 1. Noise Reduction Levels at Octave Band Center Frequencies.

Attenuation	Freq (Hz)
0.49	125
0.37	250
0.83	500
0.96	1000
0.99	2000
1.0	4000
1	8000

TABLE 2. Absorption coefficients at Octave Band Center frequencies.

### Notes:


- Dimensions of the construction / fabrication shall be as per the diagrams attached in section 4. (Audiometric Suite layouts) of this document, unless otherwise specified in section 3. (Technical Specification).
- conditioning supply and refurn duct lines will be routed from the Air handler Unit (AHU) of the Central AC system of the building. CFM requirement of the AG supply to be stipulated by the bidder and a request has to be made to the building contractor. (Air Internal Building contractor will provide ducts up to the facility). 2)
- Necessary noise filters, Valves, attenuators shall be installed by the bidder to Supply and Return air ducts for maintaining specified noise evels in all three rooms, and isolation of three rooms acoustically from each other. 3
- All acoustical paneling on walls and ceilings shall be with neat, rugged, durable final finish and aesthetically pleasing appearance. 4
- All Electrical accessories, Luminaires, controllers, dimmers etc. shall be compatible with AC power supply voltage AC 230 Volts, 50 Hz. 2
  - Electrical system shall have provision for a Single phase central UPS input with a Change-over switch (a UPS unit placed out of the Audiology unit premises) (9
- Bidder shall ensure the fire rating of all the material used for the construction and fabrication are high and the final product is fire proof and fire safe to the highest extent. Bidder shall liaise with the fire prevention department of UHKDU for any further requirements. 1

# 4. Audiometric Suite Layouts

### 1. Existing Layout

Dimensions – As per given in the diagram

Floor to Ceiling height: 2650 mm (8' 6")

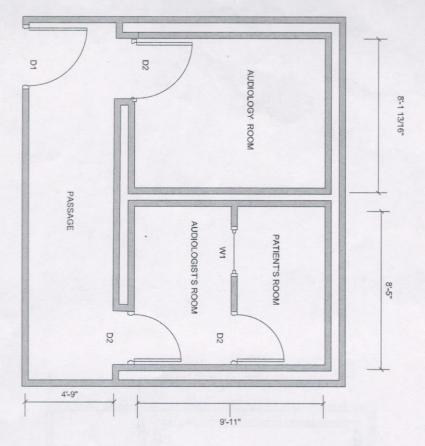


2. Proposed New Layout

Dimensions – As per given in the diagram

(,,9 (8) Floor to Ceiling height: 2650 mm



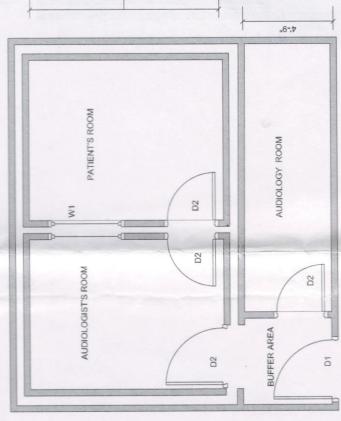

....6

# 5. Warrenty, Service Agreements and Documentation

- 1 date of successful commissioning against manufacturing defects, workmanship and all other issues All items described in the schedule should be covered by a warranty for a period of not less than 24 calendar months from the
- 2) commissioning Technology / service manuals / operations manuals, any other technical detail should be handed over to the client at the time of
- 3 Supply of spare parts, replaceable items/ consumables should be guaranteed for a period of 10 teats starting from the date of available successful commissioning. A price list for such items over a period of 10 years from the date of installation should be made

PROCUREMENT

# 6. General conditions for bidders

- power tools, welding gear etc. during the construction. The bidder shall implement maximum level of Fire safety conditions in order to prevent any possible fire hazard in using electricity,
- 2 All the material (wood, any absorbent material based on biomass etc.) are to be chemically treated before the delivery to the site to prevent development of breeding grounds for harmful insects (termites etc.), and any possible termite attacks at the site in the long run.
- 3 Bidder shall take necessary precautions to minimize disturbances to the ongoing operations of UHKDU during the construction & and implement a "No disturbances to ongoing operations during construction" policy during work fabrication work. Bidder, or any representative, can liaise with professional staff at the Audiology department of UHKDU on the same
- 4 All electrical components and conduits shall be recessed into the wall panels, and shall be wired in GI conduits with threaded joints not exposing to the exterior in order to prevent any possible electrical fires.
- 5) Screened metal galvanized (GI) power outlets (Industrial type) should be used as recessed power outlets in areas where acoustical panels, fabric lining has been installed as a part of acoustic treatment.

PROCUREMIANT MANAGER
University Hospital
General Sir John Kotelawala Defence University
Werahera

- Grounding terminal of the electrical system shall be provided by the bidder for a dedicated grounding system for the Audiometry suite. (Connection of this terminal to the earth ground is the responsibility of the client - UHKDU).
- The bidder should provide a certificate of sound level of separate rooms as mentioned in the specification, issued by a recognized third party accreditation body following the completion of fabrication, at the expense of the bidder, as recommended by ENT Consultant. UHKDU will not bear any cost related to this procedure.
  - Provisions such as access to the site, utility (electricity, water etc.) and permission for work out of office hours (night work etc. if required) are responsibility of the client, UHKDU. 8

### 7. Bidding conditions

- sound level requested by the specification, after completion, by a 3rd party accredited institution (ITI or NERD Center) at the expense Bidder should be able to show prior experience in building sound proof suits in health institutions and should be able to confirm the of the bidder, before giving QCI report.
  - Bidding document should include the methodology and a list of material intended to use in achieving the stipulated standards. (Preferably with diagrams and technical details)
- Bidder should provide details of the products (catalogs, brochures etc.) of the material as proof.
- 4. The site may be inspected with prior approval of the CEO, University Hospital of KDU during week days.

Prepared & Forwarded by

**Engineering Consultant** 

Eng. W.A.Shanthakumara BSc, MBA, PG Dip (UOM), MIET (UK), MIEEE (USA), MIIESL (SL)

6<sup>th</sup> September 2022

### **DELIVERY SCHEDULE**

(IT IS MANDATORY TO FILL THE FOLLOWING SCHEDULE BY THE BIDDER) TENDER NO

: ITEM :			QT
DURATION		QTY	
EX STOCK QTY (WITHIN 01	WEEK)		
01MONTH			
02 MONTHS			
03 MONTHS			
04 MONTHS			
TOTAL			
	,		
NAME OF THE BIDDER	:		
SIGNATURE OF BIDDER	:		
DATE	:		
OMPANY SEAL	:		

### ANNEX "D"

### SPECIMEN FORM OF BID SECURITY

company)	whose r	egistered office	is at	(hereinafter	(herein called	after called the	d "the Surety Authority")	") are held a in	and firmly the	y bound onto sum of
their succe	essors and Whereas	d assigns jointly the authority h	and severally as invited th	by those present e Tender and o	ts. ther persons	to compe	te tenders in		-	
submit the Bid") in a to be unde	e same fo eccordance ertaken by	r the considerate with such invi	ion of the Au tation, the Bo der in accorda	athority, and the ond shall provide ance with the fol	Bidder proposes	oses to sub ne Authori	mit to the Au			
	(a)	That it shall ren	nain in full fo	orce and effect u	ntil the earlies	stof				
				lays from (subm of such date abo						
				eceptance of the Authority in acco						
	(b) receipt of			n full force and e Authority stati		ırety shall	pay the full a	mount specif	fied in thi	is Bond upon
		(i) The I	Bidder has wi	thdrawn his Ten	der during the	e validity o	f this Bond, o	r		
				iled to provide a				ity in accorda	ance with	the terms of
	g the Ter	nder on the part		der, nor any for ority, nor any o						
Authority	shall retu	efit of this Bondarn the same to the dishall be gover	he Bidder.	e assignable by ws of Sri Lanka	the Authorit	y and upo	n its ceasing	to be in ful	l force a	nd effect the
	I execu	ited as a deed or	n this (	) day of (	) 20 (	)				
	For and o	on behalf of the	Bidder			For and	on behalf of t	ne Surety		
	Signed by	y				Signed b	у			
	In the cap	oacity of				In the ca	pacity of			
	and by					and by				
	In the cap	pacity of				In the ca	pacity of			
	Seal (who	ere applicable)				Seal (wh	ere applicable	e)		