Tender No:

l																		ĺ			Î							ĺ							Ì													Ĩ		
•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	 •	•	•	•	•	•	•	 •	•	•	•	•	•	•	•	•	•

University Hospital Kotelawala Defence University Werahara ,Boralesgamuwa Sri Lanka T:Phone: 0112044555 Fax: 0112044592 Web:

15 / 05 / 2023.

INVITATION TO BID AND GENERAL CONDITIONS OF TENDER

1. The Vice Chancellor of the General Sir John Kotelawala Defence University, as the Chairman, Department Procurement Committee invites Bid/s from prospective Bidders for sewage treatment plants Course & rescue training programme

HOSPITAL

General Sir John Kotelawala Defence University

2. <u>CLOSING DATE & TIME</u>. The tender will close at 1400 hrs on 31/05/2023 Any Bid submitted after the closing time of the tender will be rejected & unopened such bids will be returned to the bidder.

3. <u>VALIDITY OF BID.</u> The bid submitted under this tender <u>must be valid for a period of 120 days from the date of closing</u>

of tender.

4. <u>BID BOND / GUARANTEE</u>.

(a) If the quoted bid value exceeds Rs: 2,000,000.00, such Bids should be accompanied with 1% of Bid Value an "on demand" and "unconditional" Bid Bond/Guarantee for a sum of **Rs:** in the format given in Annex "C" through a recognized local Bank or Insurance Company registered in Sri Lanka which is authorized by the Insurance Board of Sri Lanka to issue such Bid Guarantees. All Bid Bond/Guarantees should be valid for at least 30 days more than the validity period of bids, ie, for 150 days from the date of Bid opening. <u>Cheques will not be accepted as Bid Guarantee</u>.

(b) Submission of insufficient Bid Bond/Guarantee value or period will be considered as a "**major deviation**" and such offer will not be considered for further procurement action and will be rejected.

5. <u>VALUE ADDED TAX</u>. The Bidders who bid for locally delivered items must have the VAT registration. The VAT portion must be shown separately in the price schedule in Annex "A" and VAT registration number must be indicated. If the quoted item is exempted from VAT or Bidding Company is not liable for VAT, reference number and date of relevant Act number/Gazette notification/a certificate (as applicable) **issued for the current financial year** from the Commissioner General of Inland Revenue to that effect should be submitted along with the Bid.

6. **BID SUBMISSION.** The **bidder must duly sign at the last page** (before Annexes) of this document indicating the name of the signatory and the name of the company & place the company common seal to confirm the acceptance of tender conditions. The Bid/s that do not include authorized signature will be rejected. The Bid/s duly signed by the bidder enclosed and sealed in an appropriate cover addressed to the following address should be sent by registered post or could be deposited in the appropriate tender box placed at University Hospital Kotelawala Defence University. Werahara (at the Main Entrance of University Hospital Kotelawala Defence University) on or before the time & date specified for the closing of tender. The tender reference number. date & time of closing tender should be indicated & underlined at the top left corner of the envelop.

Tender Ref No : Closing Date & Time :.1400 hrs on 31/05/2023	The Chairman, Department Procurement Committee,
	University Hospital Kotelawala Defence University,
	Werahara,
	Sri Lanka.

7. The Bid/s must be submitted in the attached schedule of prices in Annex "A" as applicable. However, bidders could use similar formats prepared with their own letter heads with all the details mentioned therein and submit in <u>three copies along with duly signed copy of a General</u> <u>Conditions of tender</u>. The Bid/s must contain Technical Literature, Pamphlets, Drawings and Quality Standard Certificate etc necessary to determine characteristics of items offered and in case of Machinery/Vehicles & Equipment, servicing and workshop data/after sales service, back up facilities or any other facilities provided by the supplier.

8. <u>SUBMISSION OF SAMPLES/PAYMENT OF TESTING CHARGES</u>.

When it is required to submit samples, <u>every offer</u> must be accompanied with pre - marked samples. The marking of samples <u>indicating the Bidder &</u> <u>Offer number</u> must be done and the samples must be handed over to the officer at same place where tender box is placed <u>on or before the closing date</u> <u>& time of the Bid</u>. Samples submitted after closing time of the Bid will be rejected. The documents such as Air Way Bills etc, will not be accepted in place of samples. When the testing charges are required to be paid, bidders shall pay testing charges separately <u>for all offers</u> indicated in their bid/s.

(1) <u>Samples</u>. Please submit samples.

(2) <u>Testing Charges</u>. A sum of Rs. <u>per offer</u> must be paid to the Bursar of KDU, prior to the submission of bid and a copy of the receipt must be annexed to the bid. It is the responsibility of bidder to inform the Cashier of the Account Office to note the tender number on the receipt issued for such payments.

8. **BID OPENING**. All duly received bids **will be opened immediately after the scheduled closing time of Bids at the same venue**. Bidders or their accredited agents could be present at the time of opening of bids.

9. PRICES.

For locally delivered items (including locally manufactured items & foreign items imported by the bidders) price must be quoted in Sri Lankan Rupees, inclusive of all charges for delivery of items to University Hospital General Sir John Kotelawala Defence University Werahara,. <u>Unit</u> price. VAT and Total price should be clearly indicated in schedule in Annex "A". Other than VAT, all other type of taxes (eg : NBT, BTT, etc.) should not be indicated separately and should be included in unit price.

10. **RESTRICTED TENDERS**. Invitation to Bids are circulated among the registered suppliers with Ministry of Defence (MOD), only bids submitted by registered suppliers will be allowed for consideration. However, Chairman, Department Procurement Committee reserves the right to invite the bids from multiple combinations of Procurement Methods as stipulated in Chapter III of the Government Procurement Guideline, 2006 to ensure highest competitiveness.

11. **PERFORMANCE BOND/GUARANTEE.** A successful bidder shall furnish a Performance Bond/Guarantee in the form of "On Demand" & "Unconditional" Bank/Insurance Guarantee for a sum equivalent to 10% of the contract value for every contract that exceeds Rs. 2,000,000.00 or equivalent amount in foreign currency through a recognized Commercial Bank registered in Sri Lanka or through an Insurance Company authorized by the Insurance Board of loss resulting from the supplier's failure to complete his performance obligations under the contract. If the contracted supplier fails to deliver the items Sri Lanka to issue such Performance Guarantee for this purpose, within two weeks from the date of notification of award. The proceeds of the Performance Bond/Guarantee shall be payable to the Vice Chancellor of the General Sir John Kotelawala Defence University as compensation for any o

12. time or fails to complete the works as per the agreed contract, THE TOTAL VALUE OF THE PERFORMANCE BOND/GUARANTEE will be forfeited. If only partial delivery is made during the agreed contract period, the corresponding value percentage of undelivered quantity from the Performance Bond/Guarantee will be forfeited.

13. SIGNING OF CONTRACT. The notification of award will be transmitted to the successful bidder by post, by fax or email. This notification constitutes the formation of the contract. The successful bidder should submit his written acceptance for the award and performance bond / guarantee (For awards over Rs. 500,000,00 without VAT) within 14 days of receipt of such notification. Upon acceptance of the award and furnishing of the Performance Bond/Guarantee, the successful bidder will have to enter into a formal contract with the Vice Chancellor of the General Sir John Kotelawala Defence University by signing the Contract.

14. Preference will be given for early delivery. In case of bulk supplies for locally manufactured items, the delivery of **DELIVERY**. total quantity must be completed within 120 days of signing of contract, unless mutually agreed for extended delivery period with University Hospital Kotelawala Defence University. The bidder/s must indicate the proposed delivery schedule in Annex "E". In the event of placing a purchase order with the successful bidder, the total quantity so ordered must be supplied as one consignment unless part deliveries are agreed upon in the contract. The deliveries not made as per agreed delivery schedule will be considered as bad performances by the suppliers and no extended delivery period will be authorized. Under extreme unavoidable conditions too, the Chairman, Department Procurement Committee (Vice Chancellor of the General Sir John Kotelawala Defence University) reserves the right to grant or refuse delivery period extensions only within the current financial year with or without liquidated claim for delayed deliveries and that decision will be final.

15. LIOUIDATED DAMAGES. In case of delivery period extensions requested by the successful bidder, a sum equivalent to 2% of the total value of the delayed supply per delay of one week or part thereof may be deducted from the payment due to the supplier from the University Hospital General Sir John Kotelawala Defence University as liquidated damages up to the maximum limit of 10% of the total value of delayed supplies.

16. **PAYMENT TERMS FOR LOCALLY DELIVERED ITEMS.** Payment will be made after acceptance of items which should be subjected to a pre-acceptance inspection/testing by University Hospital General Sir John Kotelawala Defence University authorities. The delivery made to University Hospital should not be considered as quantities taken over by University Hospital General Sir John Kotelawala Defence University until items are properly accepted after pre-acceptance inspection. Any item that does not conform to the specifications or already approved sample will be rejected & it is the responsibility of the supplier to remove them from University Hospital stores/premises within 07 working days of such intimation (either verbal or written) at his own cost and replace them with items conforming to specification within one month of such rejection. The bidder shall allow approximately 60-90 days period of credit from the date of acceptance of items for Account Office, University Hospital General Sir John Kotelawala Defence University to obtain liquid cash from General Treasury & release the payment.

RIGHTS OF THE PROCUREMENT COMMITTEE. The Department Procurement Committee reserve the right to accept or reject whole or 16. part of this tender and their decision will be final. The successful bidders will be notified. Information with regard to rejected or unsuccessful bids will not be communicated.

Thanking You,	
Yours faithfully,	
Holen	
JMSR Jayawardana	
Lieutenant Commander (S)	
PROCUREMENT MANAGER	
For Vice Chancellor	
University Hospital Kotelawala Defence University	ity

I/We agree to abide by the conditions of tender and undertake to supply the items as per delivery schedule mentioned in the contract, in the event of an order been placed with me/my firm/company as a result of this tender.

..... Signature Name of Signatory

.....Name of the Company/Bidder

Date :-

Company seal

FILE NO - UHKDU/PRO/SOGE/SVS/0524/2020

SCHEDULE OF PRICES FOR LOCALLY DELIVERED ITEMS

S/N	ITEMS	UNIT	QTY	PRICE EACH SLRS	TOTAL PRICE SLRS
01	Design, Fabrication & Build of Soundproof				
	Audiology Room Of ENT				
	Specification is attached here with Annex "B"				
	TOTAL				
	DISCOUNT				
	TOTAL(AFTER DISCOUNT)				
	VAT %				
	GRAND TOTAL				

2.	a . Validity	: 120 days from the date of closing of tender
	b . Payment term	: Credit
	c .Warranty	:
	d . Brand name	:
	e .Country of origi	:

3.	VAT Registration No	. :	
4.	Name of the Compan	y :	
5.		: Rs	
6.	Signature of Bidder	:	
7.	Date.	:	
8.	MOD registered No	:	Company Seal :

PRO ANAGER University Hos General 9 onn Kotelanista Defence Unaversally Werahera

	Item Number	of th 3. Tec	2.1 This	1) Audi 2) Cont 3) Audi	Proposed Au	The scope of proposed by	2. Scope	Setting up a phearing impa	1. Project	
1. Noise level < 34 dB	Requirement Audiometric Booth	of the three functional modules. Technical Specifications	2.1 Scope of the document This specification addresses the needs of stimulation of standards for the setting up of the aforementioned Audiometric suite comprising	Audiometric Booth (Patient's Room) Control Room (Audiologist's room) Audiology Room (ABR room)	Proposed Audiometric suite comprises of three sound proof functional modules.	The scope of the project involves re-configuration of the room layout in the allocated space in the existing building, as per the new room layout proposed by the ENT Consultant of UHKDU, soundproofing and final finishes to comply with professional standards.	pe	Setting up a professional Audiometric suite for ENT Department of University Hospital of KDU, for conducting Diagnostic tests for patients with hearing impairments and related issues.	ject	
	Priority category		ards for the sett		al modules.	in the allocated finishes to comp		niversity Hospit		
	Conformity Yes No		ing up of the afore			l space in the existi oly with profession	a new of	al of KDU, for cond		
	Proof		mentioned Audior)	Torrest above	ng building, as per al standards.		ucting Diagnostic	a di a la la na	
	Bidder's offer Remarks		metric suite comprising			r the new room layout		tests for patients with		
		to 10	/							

U

PROCUREER AN MANAGER University Hospital General Sur John Kotelanista Delence University Werathera

ANNE

- 1

	be less than 34 dB with Air-conditioning system switched "on." All structure borne vibrations shall be eliminated through means of isolation Double wall construction shall be used where necessary & applicable. Refer to table 1. below for details of NR characteristics.	Sound Absorption level – Material Average NRC > 0.9	Internal sound absorption shall be at or better than the levels given in the table 2. at respective frequencies indicated.	Any acoustically hard surfaces shall be lined with absorbent layers in order to minimize sound reflection.	Reverberation time < 0.25 seconds.	Wall construction	Construction of masonry walls, during the re-configuration of current room layout,	shall be carried out using the same types of material as in the existing construction	(Concrete, Cement blocks, Bricks etc.) but	no subst tutes.	Inner walls shall be treated with acoustically absorbent material of which	NRC>0.9 (2-inch thickness rock wool, glass	wool etc. on wooden frames etc.) to improve absorption and a top final finish
								HICH PLANE	r patienten		Contractor State	ALL MARKED	

Werabera

139

PROCURESTON MANAGER University Hospital General Str. John Kotelanista Defence University Werathera

 layer. Asymmetric wall constructions shall be applied , where necessary, to minimize Reverberation time. Roof (Ceiling) construction Roof (Ceiling) construction A secondary ceiling, Isolated from the building structure, shall be rested on inner walls of the booth in order to make it a sealed & sound proof inner booth. Air conditioning ducts should be terminated at this ceiling, with circular diffusors through flexible couplings. Inner surface of the ceiling should be 		 Floor construction A floating floor, acoustically isolated from the structural floor, shall be installed. Thickness > 25mm solid floor (Excluding re-enforcement frame, if any). Shall be strong enough to bear the weight 	
	<u>.</u>	ui ∷ i≣	. v.

PROCURESSION MANAGER University Hospital General Str. John Kotelanista Defence University Werathera

6.	Door
	Shall be Sound proof, single leaf and flush
	mounted to the wall with frame.
:	Material - Steel (Gl coated and spray
	painted or powder coated).
:=	STC Rating >50
	Dimensions of D2 - 7' (H) x 3' (W) x 2.5"
	(D).
iv.	Acoustically treated to be sound proof and
	absorptive.
۷.	Shall be anchored with heavy duty, offset
	pivoted, cam-lift hinges (self closing).
vi.	Fitted with Dual line Neoprene / EPDM
	Rubber compression beading on the
	perimeter for sound proofing (all four
	sides).
vii.	Bottom sill - Stainless Steel plate
	compressed.
viii.	Tower Bolt type latches (Stainless Steel).
ix.	Stainless Steel Push Plates & Pull handles.
х.	Dual layer glass Vision Panel.
xi.	Modular fabrication of Door & Frame.
7.	Window - (To control room)
	Condensation free Double Glazed unit
	(DGU) glass window with 6mm glasses
	Hermetically sealed.
і.	Encapsulated in Aluminum / GI Frame
	Dimensions 4' (W) x 3' (H)
iv.	STC > 45
۷.	Desiccator material included in the gap.

-

	Tem III. I. Spe	Temperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30" height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted), Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type spéaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	Temperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30" height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted), Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type spéaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	Temperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30" height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted), Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type spéaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points																													
In Spe	remperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30° height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted). Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type speaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	remperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30° height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted). Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type speaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	remperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30° height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted). Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type speaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	remperature Adjustable - between 20 - 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same. Illumination Minimum Light level - 800 Lux , Inside at 30° height level from the floor of the booth. Colour Temperature >6000 K (Cool white) RFI free LED lighting. 02 lighting fixtures (ceiling mounted). Flicker-free, even distribution with diffused light. Pre wired individual switches with RFI-free Dimmers. Speaker mounts Vertical pole type speaker mounts (02 Nos.) - Acoustically isolated from the floor, walls or ceiling. floor, walls or ceiling. 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) Height adjustable along the vertical pole Pre-wired speaker points	11	iv.	III.		II.				10.		٧.			iv.						9.		iv.				÷	Ģ	x	VI.
							Height adjustable along the vertical pole	(compatible with the weight of speaker)	02 Nos. Swivel mounts with Three DOF	floor, walls or ceiling.	Nos.) – Acoustically isolated from the	Vertical pole type speaker mounts (02	Speaker mounts	Dimmers.	Pre wired individual switches with RFI-free	diffused light.	Flicker-free, even distribution with	02 lighting fixtures (ceiling mounted),	RFI free LED lighting.	Colour Temperature >6000 K (Cool white)	booth.	30" height level from the floor of the	Minimum Light level - 800 Lux , Inside at	Illumination	be installed for the same.	Controller mechanisms / Electronics shall	See note 2 below.	See note 1 below.	Centigrade.	Adjustable - between 20 – 27 degrees		Temperature	Lichible confirmed to the method of the
																							/										

PROCURTER AND MANAGER University Hospital General Sur John Kotelanista Defence University Werahera

 A Flush mount metallic patch panel shall be installed below the window to the 	 control room. ii. It shall contain, 3-pin Standard ¼" Phone sockets - 04 nos. USB sockets - 02 nos. 9-pin D socket - 01 No. BNC sockets - 02 nos. 2-pin Speaker sockets - 02 nos. 	 These connectors shall be connected to a similar patch panel (via one-to-one trunk lines), to be installed on the other side of the same wall, in the control room 	 (Audiologist's room)- Refer "item 11" under "control Room specifications". iv. Metallic plate shall be connected to system ground. 	12. Electrical outlets	 13 Amp Square pin (with ground) outlets 04 Nos below the Interface jack panel. 	3. Acce	 A norizo ttal nanger bar for patch capies, headphcnes etc. on the wall, mounted close to the patch panel. 	Control Room	 Noise level < 40dB Ambient noise level inside the control
patch panel shall window to the	ne sockets - 04 nos. - 02 nos.	be connected to a one-to-one trunk n the other side of ntrol room	Refer "item 11" specifications". connected to		th ground) outlets – erface jack panel.		e wall, mounted		ide the control
an and support the log									

General Sir John Kotelasista Defence University Werahera

 4. Roof (Ceiling) . An acoustically treated ceiling shall be installed to achieve stipulated noise and absorption conditions, reverberation times. ii. Air conditioning ducts should be terminated at this ceiling, with circular diffusors through flexible coupling. iii. A secondary ceiling shall be installed, in case if the stipulated conditions cannot 	 Wall construction Construction of masonry walls, during the re-configuration of the room layout, shall be carried out using same types of material as in the existing construction (Concrete, Cement blocks, Bricks etc.) but no substitutes. Inner walls shall be treated with acoustically absorbent material and a top final finish layer. 	 Sound Absorption level – Material Average NRC > 0.9 Internal sound absorption shall be at an average level of 0.6 or more. Any acoustically hard surfaces shall be lined with absorbing layer in order to minimize sound reflection. 	room shall be less than 40 dB with Air conditioning system switched "on". ii. All structure borne vibrations shall be eliminated through means of isolation or absorption.
		A manual of the second	
			£

PROCURE BROWN MANAGER Unwersity Hospital General Str. Jonn Kotelaniata Defence Unaversally Werathera

PROCURSER OW University Hospital General Str. John Kott Werabera 11 Acoustically treated to be sound proof and conditioning ducts should be terminated Existing floor shall be treated acoustically vibrations, sound and minimize foot step Shall be sound proof, single leaf and flush Material - Steel (GI coated, Spray painted Shall be anchored with heavy duty, offset Dimensions of D2 - 7' (H) x 3' (W) x 2.5" to absorb Structure borne low frequency Fitted with Dual line Neoprene / EPDM Inner surface of the ceiling should be acoustically treated with absorbent layers and appropriate final finishes. perimeter for sound proofing (all four pivoted, cam-lift hinges (self closing). diffusors through flexible couplings. Rubber compression beading on the at the second ceiling, with circular noise (carpeting, under layers etc.). If a second ceiling is installed, Air be achieved with a single ceiling. mounted to the wall with frame. Bottom sill - Stainless Steel plate or Powder coated). STC Rating >50 compressed. absorptive. sides). (D). Doors Floor .≥ > vii. ·· · · := := N. > N.

	≤. ≣: =: ∞	≦≓ ≤ ≤ ⋜ ≣ ─────	ix. x. z.
Illumination Minimum Light level - 800 Lux - Inside at 30" height level of the booth. Colour Temperature > 6000 K (Cool white) 04 lighting fixtures (ceiling mounted) , Flicker-free, even distribution with diffused light.	Temperature Adjustable between 20 – 27 degrees Centigrade. See note 1 below. See note 2 below. Controller mechanisms / Electronics shall be installed for the same.	Double glazed window to the Audiometric booth. Condensation free Double Glazed unit (DGU) glass window with 6mm glasses Hermetically sealed. Encapsulated in Aluminum / GI Frame. Dimensions 4' (W) x 3' (H) STC > 45 Desiccator material included in the gap Flexible coupling for the air gap (Min. 4").	Stainless Steel Push Plates & Pull handles. Dual layer glass Vision Panel. Modular fabrication of Door & Frame. Window – (to Audiometric booth) This refers to a part of the item given above under Audiometric booth (item 6).
		PROCURSES DAY MANAGER	

PROCURE MONTANAGER Unwersity Hospital General Sur Jonn Kotelaniata Defence University Werabera

PROCURESSION MANAGER University Hospital General Str John Kotelanista Delence University Werabera

Pre wired, 02 switches (two fixtures per circuit) with RFI-free dimmers.	Speaker mounts 02 Nos. Swivel mounts with Three DOF (compatible with the weight of speaker) – Acoustically isolated from floor , wall and ceiling.	Interface connector/jack/patch panel	A Flush mount metallic patch panel shall be insta led below the window to the	Audiometric booth. It shall contain,	3-pin Standard %" Phone sockets - 04 nos. USB sockets - 02 nos.	BNC sockets - 02 nos.	2-pin Speaker sockets - 02 nos. These connectors shall be connected to a	similar patch panel (via one-to-one trunk lines), to be installed on the other side of	the same wall, in the Audiometric booth (Patient's room)- Refer "item 11" under	"Audionietric booth specifications".	system ground.	Electrical outlets	13 Amp Square pin (with ground) outlets – 04Nos below the Interface jack panel,	on the same wall.
		11.		ij			i			iv.		12. [

-

-					3		
5. Floor i. Existing floor shall be treated acoustically to absorb Low-Frequency vibrations,	 4. Ceiling i. Primary ceiling shall be acoustically treated to maintain the required absorption level. 	 3. Wall Construction i. Inner walls shall be treated with acoustically absorbent foam backed fabric layer. ii. Maximum thickness shall not exceed 1" 	 Sound Absorption level - Material average> 0.9 NRC. Internal sound absorption shall be at an average level of 0.6 or more. 	 Noise level < 40 dB Ambient noise level inside the control room shall be less than 40 dB with Air conditioning system switched "on". 	Audiology Room (ABR room)	 A horizontal hanger bar A horizontal hanger bar for patch cables, headphones etc. on the wall, mounted on to the left hand side of the patch panel – with provision of adequate space for the control desk. 	
						Contraction of the second sector	
	in the second						

PROCURE SECON AND University Hospital General Str. John Kotela Werabera ANAGER ela D**efence** Unaversally

-

		Martin State Control of State															Reserved by Control of	por these are in the second	and the second s		
	hsh				et								S.					and the second sec			
6. Door	Shall be sound proof , single leaf and flus mounted to the wall. i. Material - Steel	Dimensions of U2 - 7' (H) x 3' (W) x 2. (D).	iv. Acoustically treated to be sound proof	and absorptive.	v. Shall be anchored with heavy duty, offset	pivoted, cam-lift hinges (self closing).	vi. Fitted with Dual line Neoprene / EPDM	Rubber beading on the perimeter for	sound proofing (all four sides).	vii. Bottom sill - Stainless Steel plate	compressed.	viii. Key lock type latches (Stainless Steel).	ix. Stainless Steel Push Plates & Pull handles.	x. Dual laver glass Vision Panel.	xi. Modular fabrication of Door & Frame.	7. Temperatura	i. Adjustable between 20 – 27 degrees		ii. See not: 1 below.	iii. See note 2 below.	in Controller and the training

Not critical but acts as a noise buffer for two iv.Pre wired, 02 switches (two fixtures per circuit) iii. 04 lighting fixtures (ceiling mounted), Flickeri. Ambient noise level inside the Buffer area i. Minimum light level - 800 Lux - Inside at 30" 13 Amp Square pin (with ground) outlets through sound leakages through doors, if any. (Not i. Absorption can be at a moderate (>0.4 material average) level to suppress incoming noise ii. Colour Temperature > 6000 K (Cool white). free, even distribution with diffused light. i. Acoustical fabric overlaid thin layer of absorbent (max $34^{\prime\prime}$) on four sides of the wall. height level from the floor of the booth. be installed for the same. shall be less than 45 dB. with RFI-free dimmers. 04Nos. - on the wall. 2. Sound absorption level 1. Noise level < 45 dB 9. Electrical Outlets 3. wall construction 8. Illumination rooms) 4. Ceiling **Buffer Area** critical) ._. 4

PROCURSERED IN MANAGER Unwersity Hospital Geogral Str. John Kotelsmista Defence Unaversat Werahera

PROCUREER/WY A Unwersity Hospital General Str. John Kow Werabera nce Universit Shall be sound proof, single leaf and flush iii. Dimensions of D1 - 7' (H) x 3' (W) x 2.5" (D) Rubber beading on the perimeter for sound i. Floor carpeting (Loop pile carpet) with form i. Suspended acoustic panel ceiling (Mineral iv. Acoustically treated to be sound proof and ii. Colour Te nperature > 6000 K (Cool white) v. Shall be anchored with heavy duty, offset Fitted with Dual line Neoprene / EPDM viii. Key-lock type latches (Stainless Steel). x. Modular fabrication of Door & Frame. pivoted, cam-lift hinges (self closing). vii. Bottom sil - Stainless Steel plate ix. Stainless Steel Pull handles. i. 600 LUX , Even illumination. fiber etc.) with moderate absorption. proofing (all four sides). mounted to the wall. i. Material - Steel ii. STC Rating >40 compressed. or quire under layer. absorptive. 7. Illumination 5. Floor VI. 6. Door

193

0

With individual switches pre-wired to control desks of respective rooms	i. RED Warning lamps - 02 Nos. Installed over 1) Control room door 2) Audiology room door	10. Accessories	i. 13 Amp – 3-pin power outlet - 01 No.	9. Electrical Outlets	iii. 01 No. fixture (ceiling mounted) with pre wired switch on the wall.
Construction of the second sec		3		and the second se	
			Charles Press and the second second	transfer a second and	

62 83 91 99 97	30 40 50 55 55	250 500 1000 2000 40
1	55	0 4000

Table 1. Noise Reduction Levels at Octave Band Center Frequencies.

1	1.0	0.99	0.96	0.83	0.37	0.49	Attenuation
8000	4000	2000	1000	500	250	125	⁻ req (Hz)

TABLE 2. Absorption coefficients at Octave Band Center frequencies.

PROCURIES OF THE University Hospital General Str. John Kotela Werabera ata De more Unas

Notes :

- Dimensions of the construction / fabrication shall be as per the diagrams attached in section 4. (Audiometric Suite layouts) of this document, unless otherwise specified in section 3. (Technical Specification). 1)
- conditioning supply and refurn duct lines will be routed from the Air handler Unit (AHU) of the Central AC system of the building. CFM requirement of the AG supply to be stipulated by the bidder and a request has to be made to the building contractor. (Air Internal Building contractor will provide ducts up to the facility). 2)
- Necessary noise filters, Valves, attenuators shall be installed by the bidder to Supply and Return air ducts for maintaining specified noise evels in all three rooms, and isolation of three rooms acoustically from each other. 3
- All acoustical paneling on walls and ceilings shall be with neat, rugged, durable final finish and aesthetically pleasing appearance. 4)
- All Electrical accessories, Luminaires, controllers, dimmers etc. shall be compatible with AC power supply voltage AC 230 Volts, 50 Hz. 2
 - Electrical system shall have provision for a Single phase central UPS input with a Change-over switch (a UPS unit placed out of the Audiology unit premises) (9
- Bidder shall ensure the fire rating of all the material used for the construction and fabrication are high and the final product is fire proof and fire safe to the highest extent. Bidder shall liaise with the fire prevention department of UHKDU for any further requirements. 1


4. Audiometric Suite Layouts

1. Existing Layout

ŝ

Dimensions – As per given in the diagram

Floor to Ceiling height: 2650 mm (8' 6")

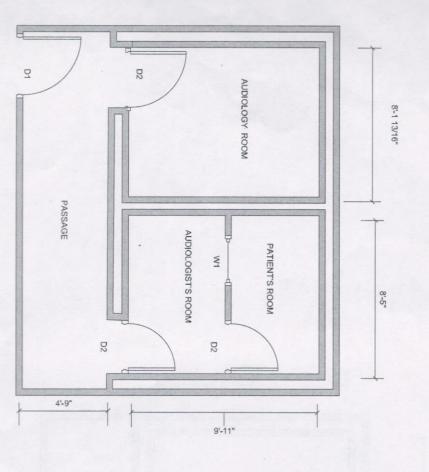


8

0

-

AGE

PROCURE ENDAT Unwersity Hosfinat General Sur John Kos Werahera ta De nerso I dana PROCURER ON MANAGER University Hospital General Str. John Katalamista Dain Merathera Mice Unand

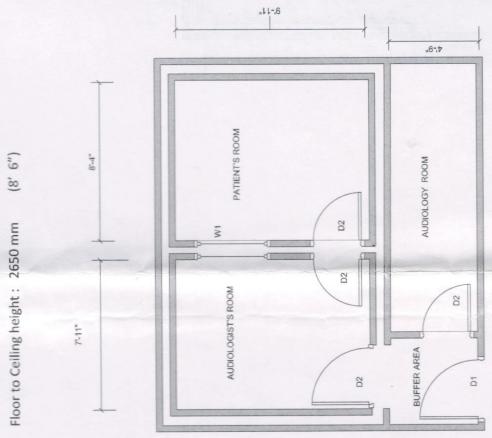

P

181 2. Proposed New Layout Dimensions - As per given in the diagram

5. Warrenty, Service Agreements and Documentation

- 1 All items described in the schedule should be covered by a warranty for a period of not less than 24 calendar months from the date of successful commissioning against manufacturing defects, workmanship and all other issues
- 2) Technology / service manuals / operations manuals, any other technical detail should be handed over to the client at the time of commissioning
- w Supply of spare parts, replaceable items/ consumables should be guaranteed for a period of 10 teats starting from the date of available. successful commissioning. A price list for such items over a period of 10 years from the date of installation should be made

6. General conditions for bidders

- E power tools, welding gear etc. during the construction. The bidder shall implement maximum level of Fire safety conditions in order to prevent any possible fire hazard in using electricity.
- N All the material (wood, any absorbent material based on biomass etc.) are to be chemically treated before the delivery to the site to prevent development of breeding grounds for harmful insects (termites etc.), and any possible termite attacks at the site in the long run.
- w Bidder shall take necessary precautions to minimize disturbances to the ongoing operations of UHKDU during the construction & and implement a "No disturbances to ongoing operations during construction" policy during work. fabrication work. Bidder , or any representative , can liaise with professional staff at the Audiology department of UHKDU on the same
- 4 All electrical components and conduits shall be recessed into the wall panels, and shall be wired in GI conduits with threaded joints not exposing to the exterior in order to prevent any possible electrical fires.
- 5 Screened metal galvanized (GI) power outlets (Industrial type) should be used as recessed power outlets in areas where acoustical panels, fabric lining has been installed as a part of acoustic treatment.

PROCUR Unwersity Trail 9

Grounding terminal of the disctrical system shall be provided by the bidder for a dedicated grounding system for the Audiometry suite. (Connection of this terminal to the earth ground is the responsibility of the client - UHKDU). 6

30

- The bidder should provide a certificate of sound level of separate rooms as mentioned in the specification, issued by a recognized third party accreditation body following the completion of fabrication, at the expense of the bidder, as recommended by ENT Consultant. UHKDU will not bear any cost related to this procedure. 1
 - Provisions such as access to the site, utility (electricity, water etc.) and permission for work out of office hours (night work etc. if required) are responsibility of the client, UHKDU. 8

7. Bidding conditions

- sound level requested by the specification, after completion, by a 3rd party accredited institution (ITI or NERD Center) at the expense 1. Bidder should be able to show prior experience in building sound proof suits in health institutions and should be able to confirm the of the bidder, before giving QCI report.
 - Bidding document should include the methodology and a list of material intended to use in achieving the stipulated standards. (Preferably with diagrams and technical details) N'
 - Bidder should provide distails of the products (catalogs, brochures etc.) of the material as proof. s.
- 4. The site may be inspected with prior approval of the CEO, University Hospital of KDU during week days.

Prepared & Forwarded by

Engineering Consultant

Eng. W.A.Shanthakumara BSc, MBA, PG Dip (UOM) , MIET (UK), MIEEE (USA), MIIESL (SL)

6th September 2022

University Ho General Sur Je

ANNEX "D"

SPECIMEN FORM OF BID SECURITY

submit the same for the consideration of the Authority, and the Bidder proposes to submit to the Authority a Bid (hereafter called "the Bid") in accordance with such invitation, the Bond shall provide security to the Authority that the Bidder will honour certain obligations to be undertaken by him in the Tender in accordance with the following conditions. **Now the Conditions of this Bond are:**

(a) That it shall remain in full force and effect until the earliest of

(i) (Date), being () days from (submission date), the date stipulated by the Authority for the submission of tenders, or any prolongation of such date above notified to the Authority by the Bidder and the Surety in writing.

(ii) In the event of acceptance of the Tender by the Authority, the date upon which the Bidder provides a performance security to the Authority in accordance with the terms of the contract thereby made between them, or

(b) Subject to this Bond being in full force and effect, the Surety shall pay the full amount specified in this Bond upon receipt of first written demand form the Authority stating that.

(i) The Bidder has withdrawn his Tender during the validity of this Bond, or

(ii) The Bidder has failed to provide a performance security to the Authority in accordance with the terms of the tender within 14 days from receipt of intimation of award of the Tender.

No alteration in the terms of the Tender, nor any forbearance of forgiveness in or in respect of neither any matter or thing concerning the Tender on the part of the Authority, nor any objection from the bidder shall in any way release the Surety from any liability under this Bond.

The benefit of this Bond shall not be assignable by the Authority and upon its ceasing to be in full force and effect the Authority shall return the same to the Bidder.

This Bond shall be governed by the laws of Sri Lanka

Ι	executed as a deed on this () day of () 20 ()
For	and on behalf of the Bidder			For and on behalf of the Surety
Sig	ned by			Signed by
In t	the capacity of			In the capacity of
anc	l by			and by
In t	he capacity of			In the capacity of
Sea	al (where applicable)			Seal (where applicable)

PROCURES AN MANAGER Inversity Hospital

DELIVERY SCHEDULE

(IT IS MANDATORY TO FILL THE FOLLOWING SCHEDULE BY THE BIDDER) TENDER NO :

ITEM :QTY :

.....

DURATION	QTY
EX STOCK QTY (WITHIN 01 WEEK)	
01MONTH	
02 MONTHS	
03 MONTHS	
04 MONTHS	
TOTAL	

COMPANY SEAL ::

PROCURTERIZAY ARAMAGEIR Unwersity Hospital General Sir John Kotelanista Defence University Werahera